




**Product type: Straight Cable Jacks**

**Product number: GLB11BNC**

|                                 |  |        |
|---------------------------------|--|--------|
| Frequency Range(GHz)            | 2  |        |
| Characteristic impedance(ohm)   | 50   |        |
| VSWR                            | ≤1.30  |        |
| Insulation resistance           | ≥5000MΩ  |        |
| Dielectric Withstanding voltage | 1500V(rms)                                       |        |
| Disengage force                 | ≥0.6N  |        |
| Contact resistance              | Center conductor                                 | ≤1.5mΩ |
|                                 | Outer conductor                                  | ≤1mΩ   |
| Connector                       | BNC  |        |
| Apply cable                     | 7/50S+D  |        |
| Length(mm)                      | Φ 14.5*32*3.1(Φ A=3.1)                           |        |
| Durability                      | 500 Cycles                                       |        |
| <b>MATERIAL AND PLATING</b>     |  |        |
| Lighting protection             | DC grounding                                     |        |
| Body                            | Brass,nickel plated                              |        |
| Male center contacts            | Brass,gold plated                                |        |
| Female center contacts          | Beryllium copper or phosphor bronze ,gold plated |        |
| Insulators                      | PTFE   |        |
| Crimp ferrules                  | copper alloy,nickel plated                       |        |
| Temperature range               | -65~+165℃  |        |

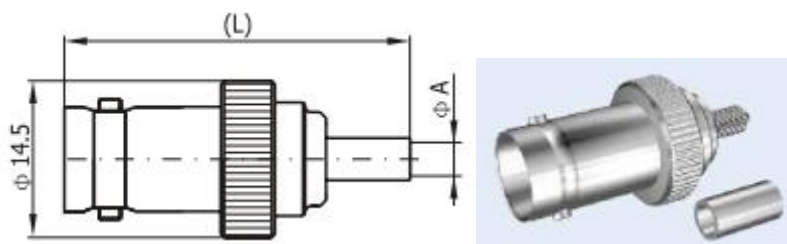

Add: Room 826, Block B,BLDG 18, University Science Park(East), Zhengzhou City,P.R.Henan,China.  
Tel: 86-371-60911368 Email:info@global-antenna.com  
Web:<http://www.asialeren.com> <http://www.global-antenna.com>