




Product type:Flexible Cable connectors/Right Angle Cable Plugs

Product number:GLDKZB11

| | | |
|---------------------------------|------------------------------------|-------|
| Frequency Range(GHz) | 0-2 | |
| Characteristic impedance(ohm) | 50 | |
| VSWR | ≤1.30 | |
| Insulation resistance | ≥1000MΩ | |
| Dielectric Withstanding voltage | 750V(rms) | |
| Voltage rating | 250V(rms) | |
| Contact resistance | Center conductor | ≤10mΩ |
| | Outer conductor | ≤5mΩ |
| Connector | DKZ | |
| Apply Cable | 2/50S | |
| Length(mm) | Φ 6*22.2*3.4(Φ A=3.4) | |
| Durability | 500 Cycles | |
| MATERIAL AND PLATING | | |
| Body | Brass,gold plated | |
| Male center contacts | Brass,gold plated | |
| Female center contacts | Beryllium copper,gold plated | |
| Insulators | PTFE | |
| Crimp ferrules | copper alloy,nickel or gold plated | |
| Spring contacts | Beryllium copper,gold plated | |
| Temperature range | -55~+125℃ | |

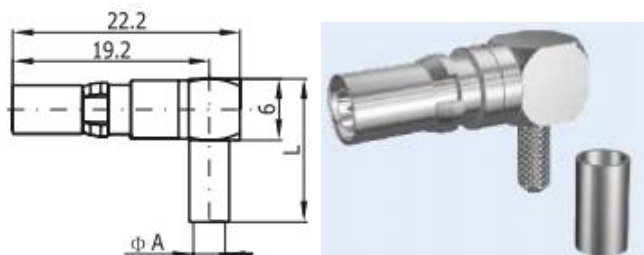

Add: Room 826, Block B,BLDG 18, University Science Park(East), Zhengzhou City,P.R.Henan,China.
 Tel: 86-371-60911368 Email:info@global-antenna.com
 Web:<http://www.asialeren.com> <http://www.global-antenna.com>