




Product type:Flexible Cable connectors/Straight Cable Plugs

Product number:GLFMEC5

Frequency Range(GHz)	0-3	
Characteristic impedance(ohm)	50	
VSWR	≤1.22	
Insulation resistance	≥5000MΩ	
Dielectric Withstanding voltage	1000V(rms)	
Working Voltage	500V(rms)	
Contact resistance	Center conductor	≤10mΩ
	Outer conductor	≤5mΩ
Connector	FME	
Apply cable	2/2.5/50s/50D	
Length(mm)	Φ 3.4*30	
Durability	500 Cycles	
MATERIAL AND PLATING		
Body	Brass,nickel plated	
Male center contacts	Brass,gold plated	
Female center contacts	Beryllium copper,gold plated	
Insulators	PTFE	
Crimp ferrules	copper alloy,nickel plated	
Temperature range	-65~+155℃	

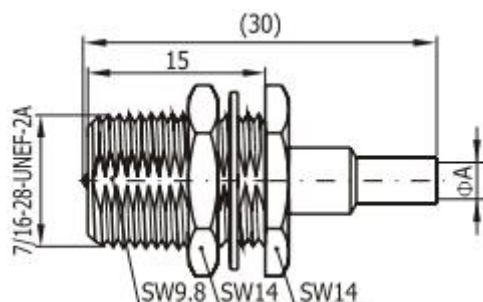

Add: Room 826, Block B,BLDG 18, University Science Park(East), Zhengzhou City,P.R.Henan,China.
 Tel: 86-371-60911368 Email:info@global-antenna.com
 Web:http://www.asialeren.com http://www.global-antenna.com