




Product type: Flexible Cable connectors/Straight Cable Jacks

Product number: GLN17

Frequency Range(GHz)	0-11	
Characteristic impedance(ohm)	50	
VSWR	≤ 1.3	
Insulation resistance	$\geq 5000M\Omega$	
Dielectric Withstanding voltage	1500V(rms)	
Contact resistance	Center conductor	$\leq 1m\Omega$
	Outer conductor	$\leq 0.2m\Omega$
Connector	N	
Length(mm)	$\Phi 16.4*35(\Phi A=3.1)$	
Apply cable	2.5/3/50S	
Durability	500 Cycles	
MATERIAL AND PLATING		
Body	Brass,nickel/gold plated	
Male center contacts	Brass,gold plated	
Female center contacts	Beryllium copper,gold plated	
Insulators	PTFE	
Crimp ferrules	copper alloy,nickel plated	
Gaskets	Silicone rubber	
Temperature range	$-40\sim+90^{\circ}C$	

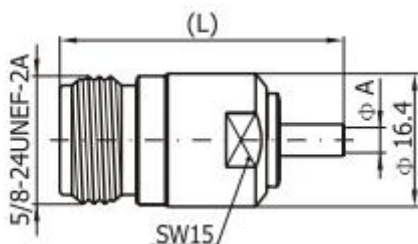

Add: Room 826, Block B, BLDG 18, University Science Park(East), Zhengzhou City, P.R. Henan, China.
Tel: 86-371-60911368 Email: info@global-antenna.com
Web: <http://www.asialeren.com> <http://www.global-antenna.com>