



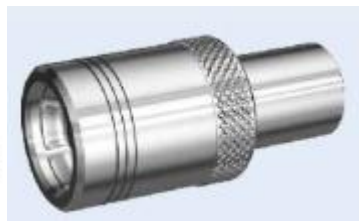

Product type:Semi-rigid Cable connectors/Straight Cable Plugs

Product number:GLSMB02

| | | |
|---------------------------------|------------------------------------|------|
| Frequency Range(GHz) | 0-4 | |
| Characteristic impedance(ohm) | 50 | |
| VSWR | ≤1.3 | |
| Insulation resistance | ≥1000MΩ | |
| Dielectric Withstanding voltage | 750V(rms) | |
| Voltage rating | 250V(rms) | |
| Contact resistance | Center conductor | ≤6mΩ |
| | Outer conductor | ≤1mΩ |
| Connector | SAA | |
| Length(mm) | Φ 6.4*14.5 | |
| Apply cable | 086 | |
| Durability | 500 Cycles | |
| MATERIAL AND PLATING | | |
| Body | Brass,gold plated | |
| Male center contacts | Brass,gold plated | |
| Female center contacts | Beryllium copper,gold plated | |
| Insulators | PTFE | |
| Spring contacts | Beryllium copper ,gold plated | |
| Crimp ferrules | Copper alloy,gold or nickel plated | |
| Temperature range | -65~+165℃ | |



Add: Room 826, Block B,BLDG 18, University Science Park(East), Zhengzhou City,P.R.Henan,China.
 Tel: 86-371-60911368 Email:info@global-antenna.com
 Web:<http://www.asialeren.com> <http://www.global-antenna.com>